lambert&fils

BEAUBIEN 07

Type	Suspension	
Materials	Body:	powder coated aluminium or brass
	Hardware:	brass
	Sphere:	milk glass (G50-G80)
	Canopy:	powder coated steel or brass
Total Height	Height to be specified upon order	
Weight	24 lb / 10.8 kg	
Light Bulb	LED (included), 2 x 4.5W + 10 x 3.5W	
Sockets	G9	
Voltage	120V / 240V	
Dimmer	Refer to our recommended list of dimmer models	
Certifications		

Notes

- Must be installed by an electrician
- Additional charges for modifications
- Lead time between 10–12 weeks
- Dimensions are approximate and may vary slightly

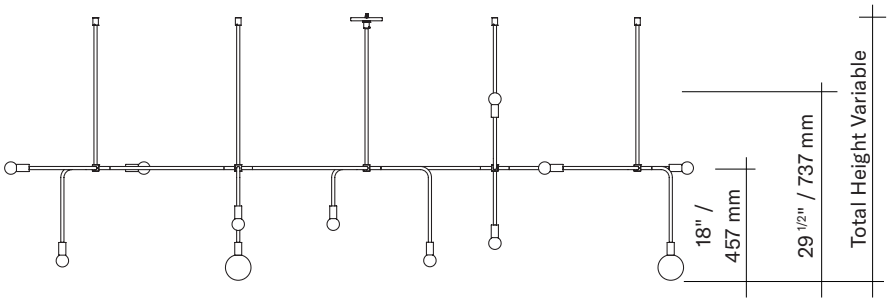



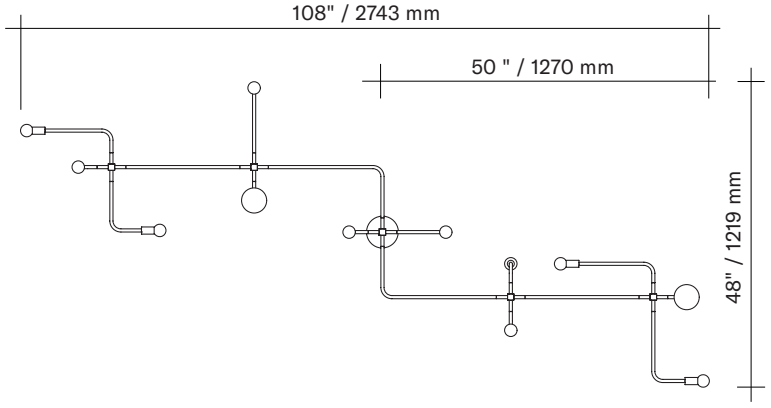

Updated: October 2018

lambert&fils

ORDER GUIDE: SKU

COLLECTION	MODEL	FINISH (body + hardware)
BEA Beaubien	07	BLBR Black body, Brass hardware
		BLGR Black body, Graphite hardware
		BRBR Brass body, Brass hardware

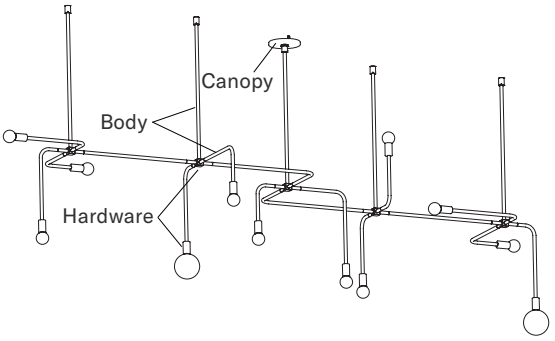

BEA 07 BLBR = **BEA07BLBR**
example

Finish

Brass

Flat black

Graphite

Canopy

Swivel option for slanted ceiling



lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
4.5W
100V-120V / 240V
450 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty



Frosted
3.5W
100V-120V / 240V
350 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty

SPHERES

G80 ∅ ±3" / 80 mm

G50 ∅ ±2" / 50 mm

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.