
lambert&fils

BEAUBIEN DOUBLE SHADE

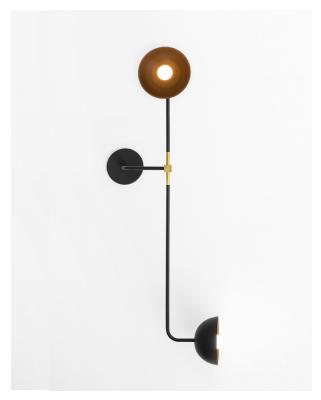

type wall

materials shade: powdercoated aluminium

body: powdercoated steel and

aluminium

hardware: brass

sphere: milk glass (G50) canopy: powdercoated steel

weight 3.0 lb / 1.4 kg

light bulb LED (included), 2 x 3,5W

sockets G9

voltage 120V / 240V

dimmer refer to our recommended list of dimmer models

certifications CEUDus CE


notes – must be installed by an electrician;

- requires a wall electric box;

– lead time between 8-9 weeks


dimensions are approximate and may vary

slightly

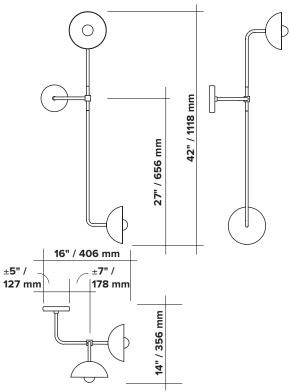


lambert&fils


ORDER GUIDE: SKU

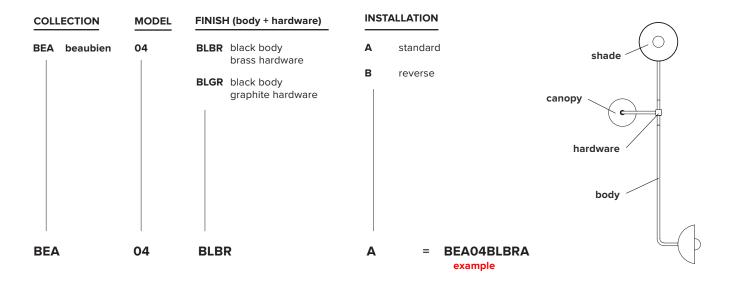

FINISH




INSTALLATION



LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS








2 years warranty

SPHERES



tube \emptyset 1" / 27 mm length ± 2" / 60 mm

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT LEGRAND - NILOÉ NIKO	V-PRO 3 996 35 310-0280X	100% 87% 94%	2% 15% 5%	no no no	very good good very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommand conducting your own test before final installation.