





LAURENT 08

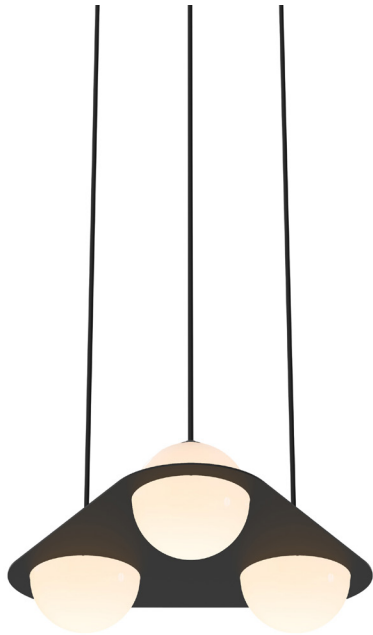


| | |
|-----------------------|---|
| type | suspension |
| materials | sphere: handblown opaline glass frame: polished brass or powder coated aluminum or nickel plated steel hardware: polished brass or powder coated aluminium wire: nylon |
| weight | 14 lb / 6 kg |
| light bulb | LED (included), 4,5W (see lightbulb section for specifications) |
| sockets | G9 |
| voltage | 120V / 240V |
| dimmer | refer to our recommended list of dimmer models |
| certifications |   |
| notes | <ul style="list-style-type: none"> – must be installed by an electrician – additional charges for modifications or for special orders – lead time between 8 to 9 weeks. – dimensions are approximate and may vary slightly. |


parallel wires

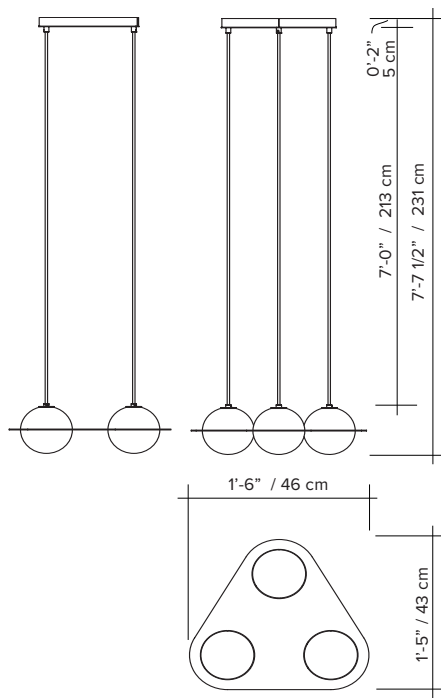

parallel wires with offset connection

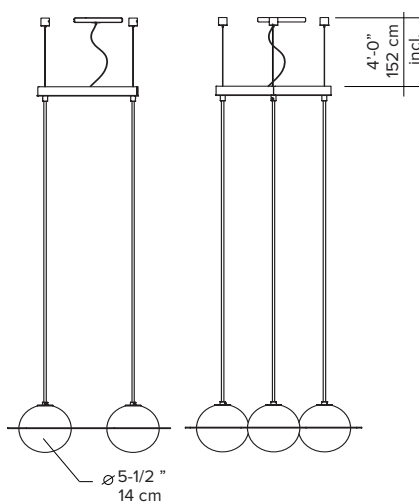


angled wires

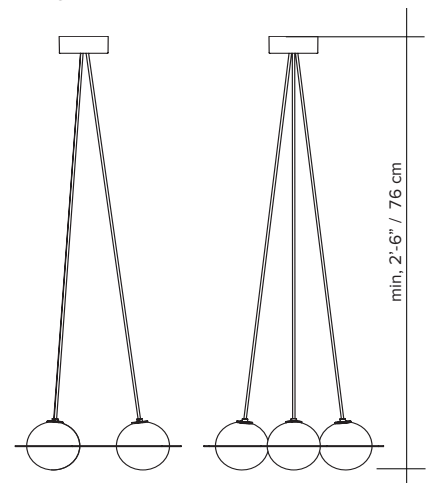

ORDER GUIDE: SKU

| COLLECTION | MODEL | COLOUR (frame + wire system) | CANOPY | MOUNTING TYPE |
|----------------|-------|---|-----------------|---|
| LRT Laurent | 08 | BLBL black + black BRBL brass + black BRGD brass + gold CHBL chrome + black CHBE chrome + blue BEBL blue + black BEBE blue + blue BUBL burgundy + black BUSA burgundy + sand BUBU burgundy + burgundy TUBL turquoise + black TUSA turquoise + sand | BL black | AW angle wire PW parallel wire |
| LRT | 08 | BLBL | BL | AW |

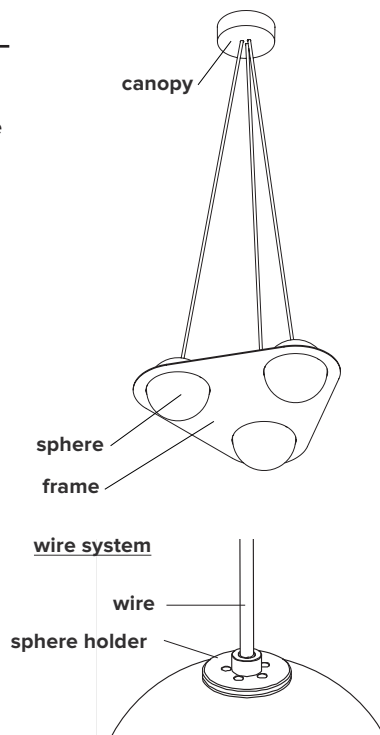

= **LRT08BLBLBLAW**
example

FRAME COLOUR



black

blue

burgundy

turquoise

brass

chrome

MOUNTING COLOUR sphere holder & wire



black

blue

burgundy

sand

gold

CANOPY COLOR



black

MOUNTING TYPE




angled wires



parallel wires

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
4.5W
100V-120V / 240V
450 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

| <u>DIMMER BRAND</u> | <u>MODEL NUMBER</u> | <u>MAX LEVEL</u> | <u>MIN LEVEL</u> | <u>FLICKERING</u> | <u>OVERALL QUOTE</u> |
|---------------------|---------------------|------------------|------------------|-------------------|----------------------|
| LUTRON - MAESTRO | MAELV-600 | 100% | 0% | 0%-10% | good |
| LUTRON - SKYLARK | SELV-300P | 100% | 0% | no | very good |
| LUTRON - SKYLARK | SELV-303P | 100% | 0% | no | very good |
| LUTRON - SKYLARK | CTELV-303P | 100% | 0% | no | very good |
| LUTRON - DIVA | DVELV-300P | 100% | 0% | no | very good |
| LEGRAND - ADORNE | TRUE UNIVERSAL | 100% | 30% | no | good |

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

| <u>DIMMER BRAND</u> | <u>MODEL NUMBER</u> | <u>MAX LEVEL</u> | <u>MIN LEVEL</u> | <u>FLICKERING</u> | <u>OVERALL QUOTE</u> |
|---------------------|---------------------|------------------|------------------|-------------------|----------------------|
| VARILIGHT | V-PRO | 100% | 2% | no | very good |
| LEGRAND - NILOÉ | 3 996 35 | 87% | 15% | no | good |
| NIKO | 310-0280X | 94% | 5% | no | very good |
| NIKO | 310-0190X | 100% | 1% | no | very good |

*Other dimmers can yield good results and we recommend conducting your own test before final installation.