lambert&fils

DOT - ANTIPODE



suspension type

materials body:

spheres: milk glass (G50 + G100)

hardware: brass

height 8 1/2" 14 1/2" 20 1/2" 26 1/2" 216 mm | 368 mm | 521 mm | 673 mm | 978 mm

min. 2 lb / 0.9 kg - max. 2.5 lb / 1.1 kgweight

light bulb LED (included), 1x 4.5W + 1x 3.5W

sockets G9

120V / 240V voltage

dimmer refer to our recommended list of dimmer models


certifications

notes - must be installed by an electrician;

> – additional charges for modifications or for special orders;


- lead time between 8-9 weeks;

- dimensions are approximate and may vary slightly.

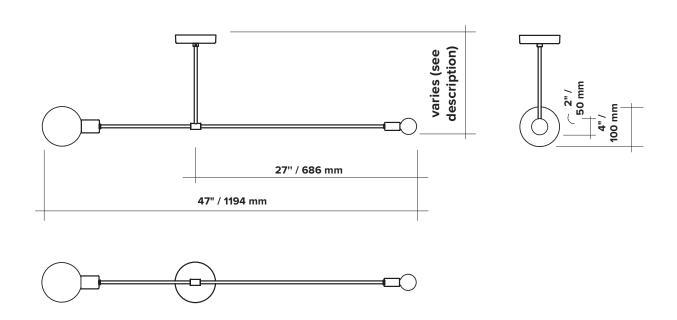

lambert&fils

ORDER GUIDE: SKU

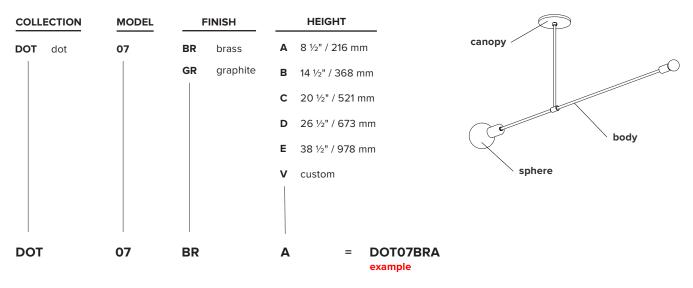

FINISH




CANOPY swivel option for slanted ceiling




lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS


G9 SOCKETS SPHERES




Frosted 4.5W 100V-120V / 240V 450 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty




Frosted 3.5W 100V-120V / 240V 350 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty











DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT LEGRAND - NILOÉ NIKO NIKO	V-PRO 3 996 35 310-0280X 310-0190X	100% 87% 94% 100%	2% 15% 5% 1%	no no no	very good good very good very good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.