
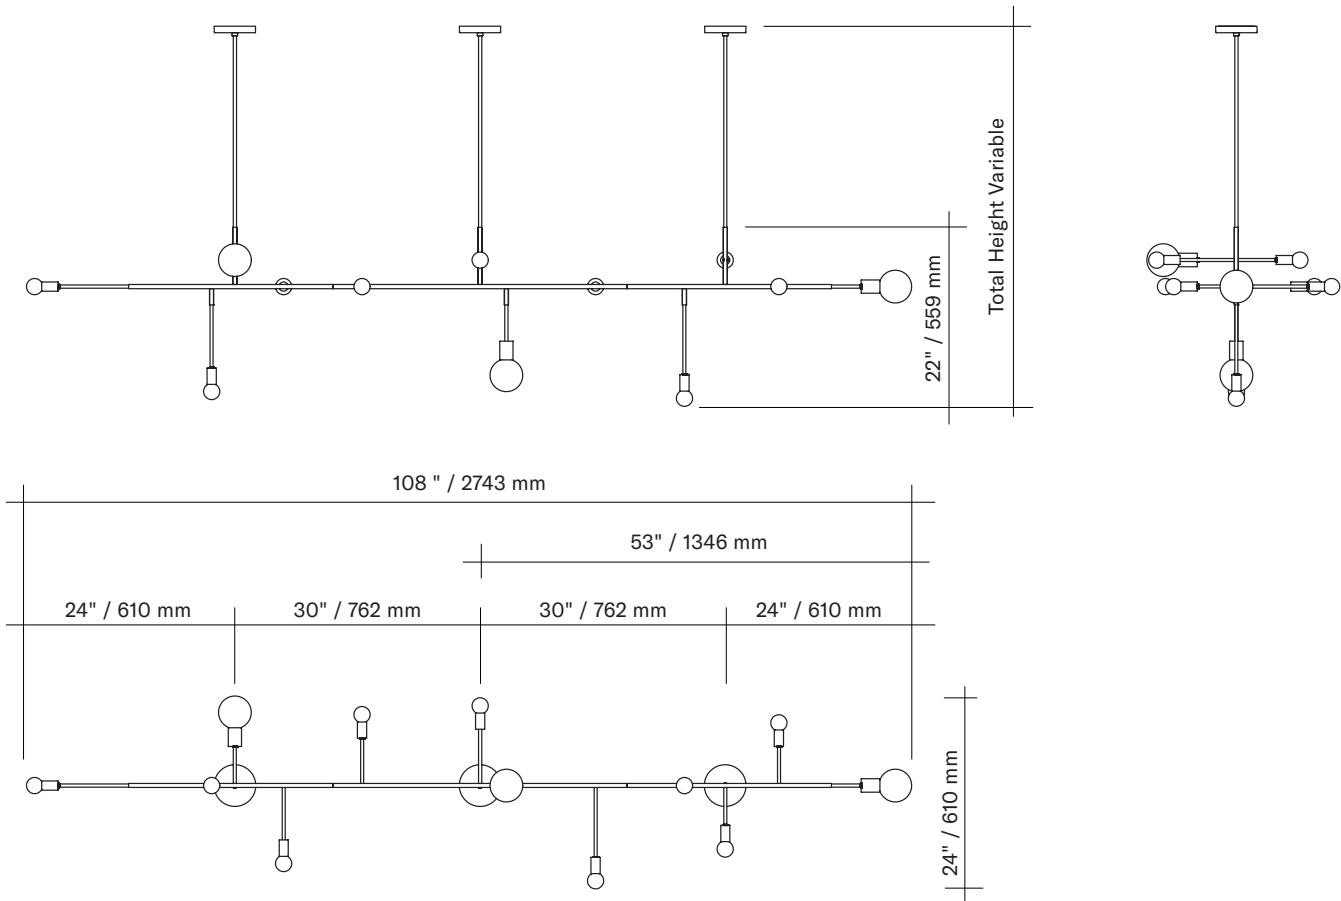


Cliff 08




Type	Suspension	
Materials	Body:	brass (Br)
	Sphere:	milk glass (G50 / G80)
	Hardware:	brass
Total Height	Height to be specified upon order	
Weight	14 Lb / 6.3 Kg	
Light Bulb	LED (included), 3x 4.5W + 9x 3.5W	
Sockets	G9	
Voltage	120V / 240V	
Dimmer	Refer to our recommended list of dimmer models	
Certifications		
Notes	• Must be installed by an electrician	
	• Additional charges for modifications	
	• Lead time between 10-12 weeks	
	• Dimensions are approximate and may vary slightly	
	• Requires three electrical boxes	




Order Guide: SKU

Collection		Model	Finish (body + hardware)	
CLI	Cliff	08	BR	Black
			GR	Graphite
CLI		08	BR	

= CLI08BR
example

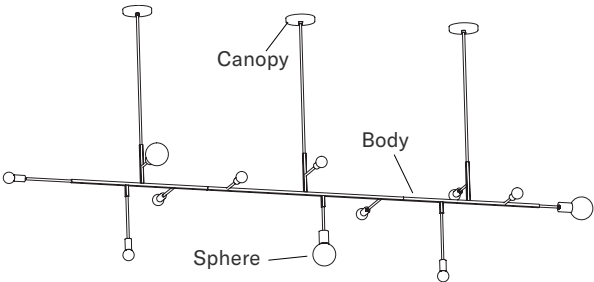

Finish



Brass




Black



Graphite


Canopy

Swivel option for slanted ceiling




Light Source & Dimmer Specifications

G9 SOCKETS



Frosted
4.5W
100V-120V / 240V
450 Lumens
2700K
25000H
CRI ≥ 80
2 years warranty



Frosted
3.5W
100V-120V / 240V
350 Lumens
2700K
25000H
CRI ≥ 80
2 years warranty



SPHERES

- G80 Ø ± 3" / 80 mm
- G50 Ø ± 2" / 50 mm

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.