


## SAINTE 04


Sainte is a collection about the forces that anchor us, a suspension light in dialogue with gravity. Reimagining the rectangle in layered, colourful glass, Sainte offers an elegant floating mass supported by robust nylon ribbons. Powered by a flat wire embedded in the nylon, these anchors carry a casual, contemporary spirit: an everyday material flirting with its graceful, minimalist centre. The form can suspend from any angle and height, and in multiples, offering infinite architectures and possibilities. As a collection, it presents a dance of contrasting materials and an equilibrium of opposing powers.

|                        |  |
|------------------------|--|
| <b>type:</b>           | suspension   |
| <b>construction:</b>   | aluminum polished light block and ceiling anchors<br>float glass body<br>nylon ribbon<br>PMMA frosted diffuser   |
| <b>specifications:</b> | source: LED array, integrated<br>power consumption: 7.9W<br>colour temperature 2700k, 3000k, dim to warm.<br>see order guide<br>colour rendering index: $\geq 90$ CRI<br>colour consistency: 3 SDCM<br>expected lifetime: 50 000h  |
| <b>control:</b>        | 120-277V: On/Off, 0-10V, Phase Dimming (120V only)<br>220-240V: On/Off, 0-10V, Phase Dimming (Trailing Edge only)<br>refer to our recommended list of dimmer models  |
| <b>ribbon length:</b>  | 20' / 610 cm, width: 2" / 5 cm   |
| <b>weight:</b>         | 7.1 lb / 3.2 kg  |
| <b>certifications:</b> |     |
| <b>warranty:</b>       | 2 years  |

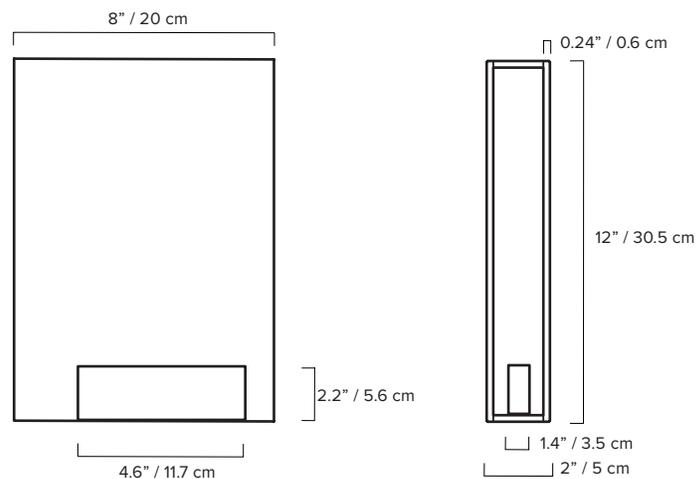


## ORDER GUIDE: SKU

| COLLECTION | MODEL | GLASS BODY SIDE A             | GLASS BODY SIDE B             |
|------------|-------|-------------------------------|-------------------------------|
| STE sainte | 04    | <b>BK</b> black               | <b>BK</b> black               |
|            |       | <b>GY</b> grey                | <b>GY</b> grey                |
|            |       | <b>FG</b> frosted grey        | <b>FG</b> frosted grey        |
|            |       | <b>EC</b> extra clear         | <b>EC</b> extra clear         |
|            |       | <b>FC</b> frosted extra clear | <b>FC</b> frosted extra clear |
|            |       | <b>GN</b> green               | <b>GN</b> green               |
|            |       | <b>BZ</b> bronze              | <b>BZ</b> bronze              |
| STE        | 04    | BK                            | BK                            |

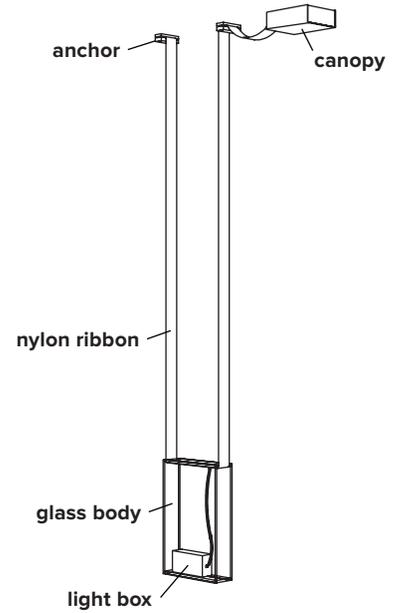


| STRAP           | CANOPY          | COLOUR TEMPERATURE (CCT)               | CONTROL                 |
|-----------------|-----------------|--|-------------------------|
| <b>BK</b> black | <b>BK</b> black | <b>WL</b> warm light (2700K)           | <b>ZT</b> 0-10V dimming |
| <b>BG</b> beige | <b>WH</b> white | <b>NL</b> neutral light (3000K)        | <b>OT</b> 1-10V dimming |
|                 |                 | <b>DW</b> dim to warm (2700K to 2200K) | <b>PH</b> phase dimming |
|                 |                 | <b>V</b> variable                      |                         |
| BK              | BK              | WL                                     | ZT                      |

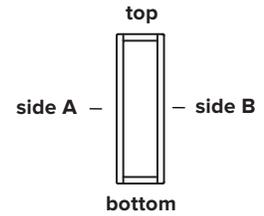

Top and bottom of glass are always ultraclear and not available in color

ZT = STE04BKBKWBKWLZT  
example


### GLASS BODY

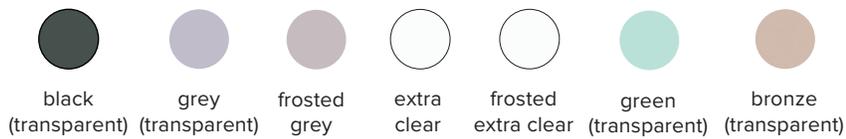

### NYLON RIBBON



### MOUNTING OPTIONS

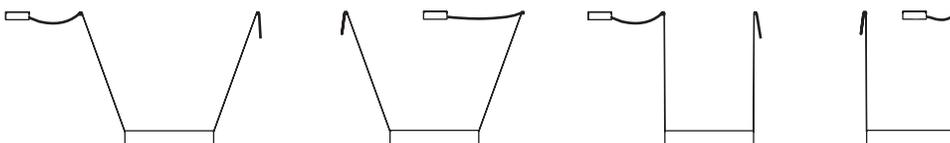

## DIMMER SPECIFICATIONS

### TESTED DIMMER COMPATIBILITY LIST - 120V\*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge\*\*)

| Dimmer brand | Model     | Dimmer protocol | Min level | Max level |
|--------------|-----------|-----------------|-----------|-----------|
| Lutron       | TGCL-153P | Phase dimming   | 14%       | 98%       |
| Leviton      | VPE06     | Phase dimming   | 14%       | 98%       |
| Lutron       | DVELV303P | Phase dimming   | 11%       | 98%       |
| Lutron       | SELV300P  | Phase dimming   | 11%       | 98%       |
| Lightolier   | ZP260QEW  | Phase dimming   | 11%       | 98%       |
| Lutron       | FAELV500  | Phase dimming   | 17%       | 99%       |
| Lutron       | MAELV600  | Phase dimming   | 18%       | 98%       |

### TESTED DIMMER COMPATIBILITY LIST - 230V\*

Compatible with 0-10V, Phase dimming (trailing edge only\*\*)


| Dimmer brand | Model     | Dimmer protocol | Min level | Max level |
|--------------|-----------|-----------------|-----------|-----------|
| Clipsal      | 32E450UDM | Phase dimming   | 31%       | 100%      |
| Clipsal      | 32E450TM  | Phase dimming   | 25%       | 100%      |

Some dimmers require a minimum load, check specifications.

\*Other dimmers can yield good results and we recommend conducting your own test before final installation

\*\*Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

## EU ENERGY LABEL

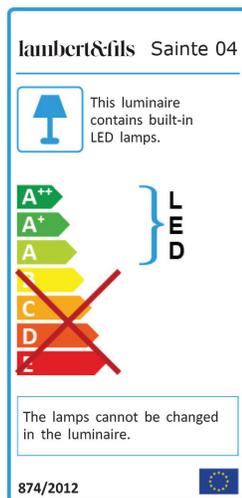

### NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions