



Side A and B







Side A




Side B

## SAINTE 08

Sainte is a collection about the forces that anchor us, a suspension light in dialogue with gravity. Reimagining the rectangle in layered, colourful glass, Sainte offers an elegant floating mass supported by robust nylon ribbons. Powered by a flat wire embedded in the nylon, these anchors carry a casual, contemporary spirit: an everyday material flirting with its graceful, minimalist centre. The form can suspend from any angle and height, and in multiples, offering infinite architectures and possibilities. As a collection, it presents a dance of contrasting materials and an equilibrium of opposing powers.


- type:** suspension
- construction:** aluminum polished light block and ceiling anchors  
laminated glass body  
nylon ribbon  
PMMA frosted diffuser
- specifications:** source: LED array, integrated  
power consumption: 11 W  
colour temperature 2700k, 3000k, dim to warm.  
see order guide  
colour rendering index:  $\geq 90$  CRI  
colour consistency: 3 SDCM  
expected lifetime: 50 000h
- control:** 120-277V: On/Off, 0-10V, Phase Dimming (120V only)  
220-240V: On/Off, 0-10V, Phase Dimming (Trailing Edge only)  
refer to our recommended list of dimmer models
- ribbon length:** 20' / 610 cm, width: 3" / 7.6 cm
- weight:** 42.1 lb / 19.1 kg
- certifications:**     IP20
- warranty:** 2 years

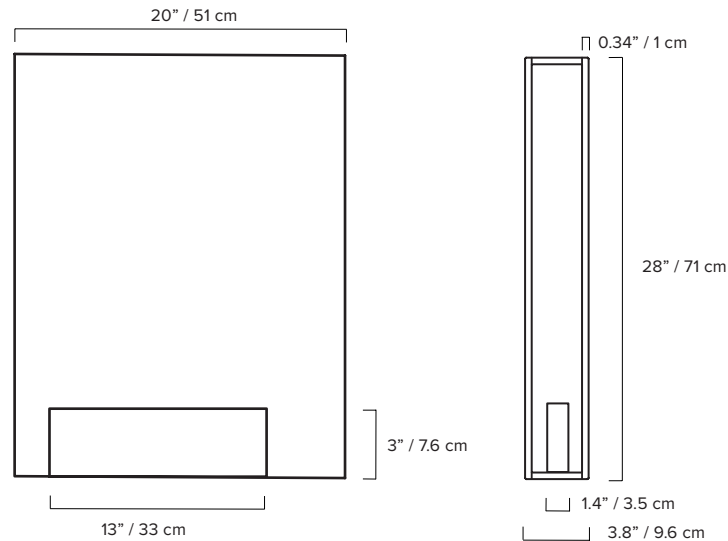


\*dimensions are approximate and may vary slightly

## ORDER GUIDE: SKU

COLLECTION	MODEL	GLASS BODY ( Side A and Side B)
STE sainte	08	MDMD medium grey, medium grey
		DRFB dark red, frosted blush
		*CC custom colour
STE	08	MDMD

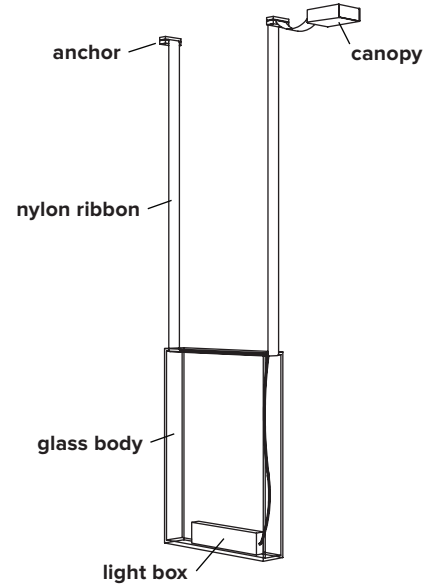

NYLON RIBBON	CANOPY	COLOUR TEMPERATURE (CCT)	CONTROL
BK black	BK black	WL warm light (2700K)	ZT 0-10V dimming
	WH white	NL neutral light (3000K)	OT 1-10V dimming
		DW dim to warm (2700K to 2200K)	PH phase dimming
		V variable	
BK	BK	WL	ZT



Top and bottom of glass are always ultraclear and not available in color

ZT = STE08MDMDBKBKWLZT  
example


### GLASS BODY (\*Custom colour available upon request)



### NYLON RIBBON



### MOUNTING OPTIONS

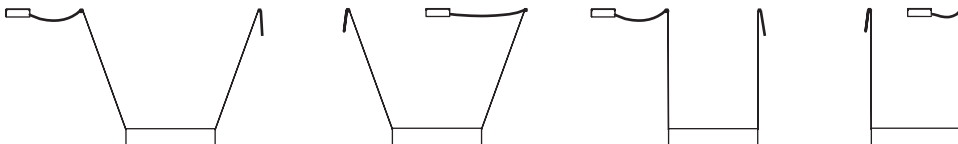

## DIMMER SPECIFICATIONS

### TESTED DIMMER COMPATIBILITY LIST - 120V\*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Lutron	TGCL-153P	Phase dimming	14%	98%
Leviton	VPE06	Phase dimming	14%	98%
Lutron	DVELV303P	Phase dimming	11%	98%
Lutron	SELV300P	Phase dimming	11%	98%
Lightolier	ZP260QEW	Phase dimming	11%	98%
Lutron	FAELV500	Phase dimming	17%	99%
Lutron	MAELV600	Phase dimming	18%	98%

### TESTED DIMMER COMPATIBILITY LIST - 230V\*

Compatible with 0-10V, Phase dimming (trailing edge only\*\*)


Dimmer brand	Model	Dimmer protocol	Min level	Max level
Clipsal	32E450UDM	Phase dimming	31%	100%
Clipsal	32E450TM	Phase dimming	25%	100%

Some dimmers require a minimum load, check specifications.

\*Other dimmers can yield good results and we recommend conducting your own test before final installation

\*\*Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

## EU ENERGY LABEL

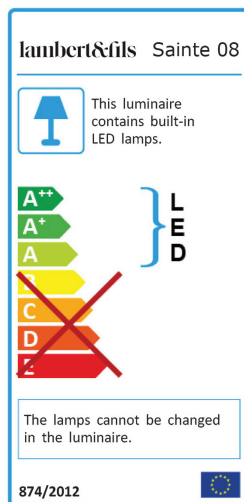

### NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions