







Side A




Side B

SAINTE 09

Sainte is a collection about the forces that anchor us, a suspension light in dialogue with gravity. Reimagining the rectangle in layered, colourful glass, Sainte offers an elegant floating mass supported by robust nylon ribbons. Powered by a flat wire embedded in the nylon, these anchors carry a casual, contemporary spirit: an everyday material flirting with its graceful, minimalist centre. The form can suspend from any angle and height, and in multiples, offering infinite architectures and possibilities. As a collection, it presents a dance of contrasting materials and an equilibrium of opposing powers.

- type:** suspension
- construction:** aluminum polished light block and ceiling anchors
laminated glass body
nylon ribbon
PMMA frosted diffuser
- specifications:** source: LED array, integrated
power consumption: 15.4 W
colour temperature 2700k, 3000k, dim to warm.
see order guide
colour rendering index: ≥ 90 CRI
colour consistency: 3 SDCM
expected lifetime: 50 000h
- control:** 120-277V: On/Off, 0-10V, Phase Dimming (120V only)
220-240V: On/Off, 0-10V, Phase Dimming (Trailing Edge only)
refer to our recommended list of dimmer models
- ribbon length:** 20' / 610 cm, width: 3" / 7.6 cm
- weight:** 31 lb / 14.1 kg
- certifications:**     IP20
- warranty:** 2 years

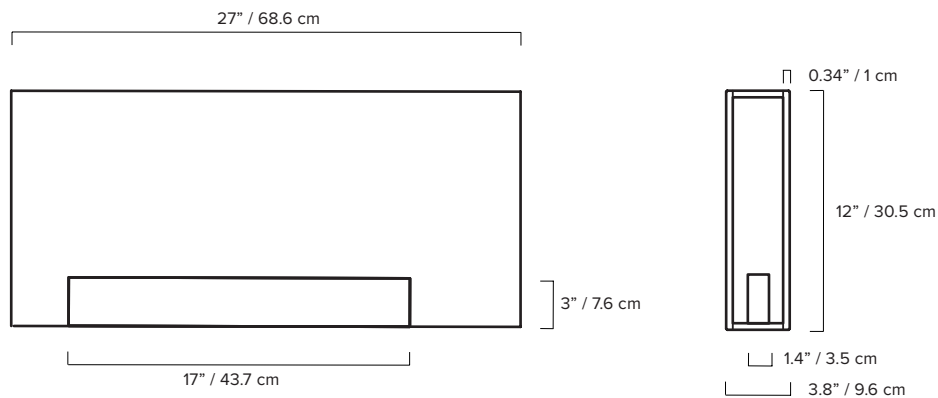



ORDER GUIDE: SKU

COLLECTION	MODEL	GLASS BODY (Side A and Side B)
STE sainte	09	LPFG light peach, frosted grey
		*CC custom colour
STE	09	LPFG


NYLON RIBBON	CANOPY	COLOUR TEMPERATURE (CCT)
BK black	BK black	WL warm light (2700K)
	WH white	NL neutral light (3000K)
		DW dim to warm (2700K to 2200K)
		V variable
BK	BK	WL

CONTROL
ZT 0-10V dimming
OT 1-10V dimming
PH phase dimming
ZT

ZT = STE09LPFGBKBKWLZT
example

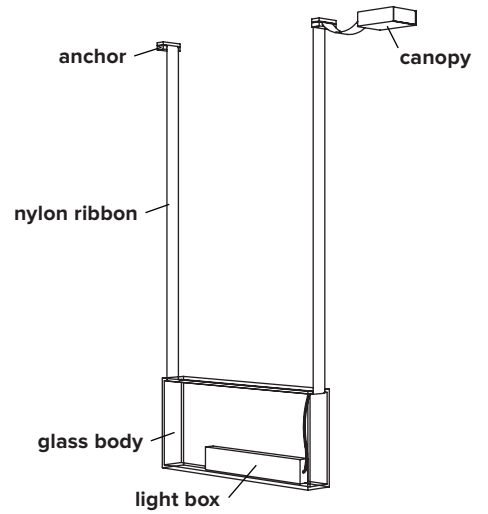


GLASS BODY (*Custom colours available upon request)



NYLON RIBBON



MOUNTING OPTIONS

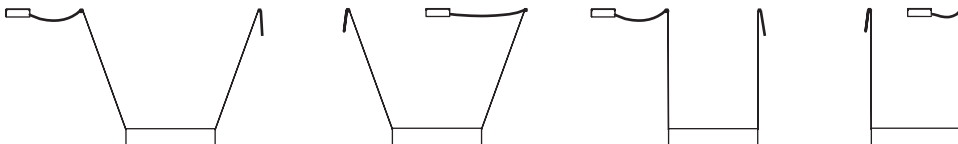

DIMMER SPECIFICATIONS

TESTED DIMMER COMPATIBILITY LIST - 120V*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge**)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Lutron	TGCL-153P	Phase dimming	14%	98%
Leviton	VPE06	Phase dimming	14%	98%
Lutron	DVELV303P	Phase dimming	11%	98%
Lutron	SELV300P	Phase dimming	11%	98%
Lightolier	ZP260QEW	Phase dimming	11%	98%
Lutron	FAELV500	Phase dimming	17%	99%
Lutron	MAELV600	Phase dimming	18%	98%

TESTED DIMMER COMPATIBILITY LIST - 230V*

Compatible with 0-10V, Phase dimming (trailing edge only**)


Dimmer brand	Model	Dimmer protocol	Min level	Max level
Clipsal	32E450UDM	Phase dimming	31%	100%
Clipsal	32E450TM	Phase dimming	25%	100%

Some dimmers require a minimum load, check specifications.

*Other dimmers can yield good results and we recommend conducting your own test before final installation

**Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

EU ENERGY LABEL

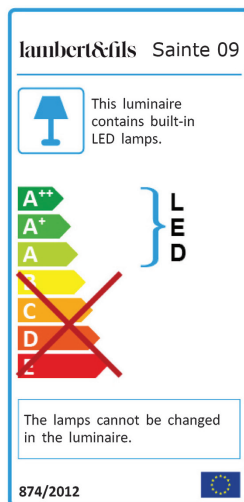

NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions