









DORVAL 01

Dorval is a lighting collection layered in history, a subtle interplay between contemporary and vintage industrial design. It is the retail-ready version of a prototype pendant originally designed by SCMP DESIGN OFFICE (Paris, France)—edited and exclusively produced in our Montreal atelier. Drawing equal inspiration from airport runway lights and the essential qualities of a chandelier, the result is a light both confrontational and intriguing—one which poses an immediate invitation to play.

- type:** pendant
- construction:** powder coated or polished aluminum body and head
clear prismatic PMMA lens
polyester cord
- specifications:** source: LED array, integrated
power consumption: 36W
lumen output: 3106lm (3000K model)
2888lm (2700K and DTW models)
colour rendering index: ≥ 90 CRI
colour consistency: 3 SDCM
expected lifetime: 50 000h
- control:** 120-277V: On/Off, 0-10V, Phase Dimming (120V only)
220-240V: On/Off, 0-10V, Phase Dimming (Trailing Edge only)
refer to our recommended list of dimmer models
- cord length:** 108" / 275cm
- weight:** 11.5lb / 5.2kg
- certifications:**     IP20
- warranty:** 2 years

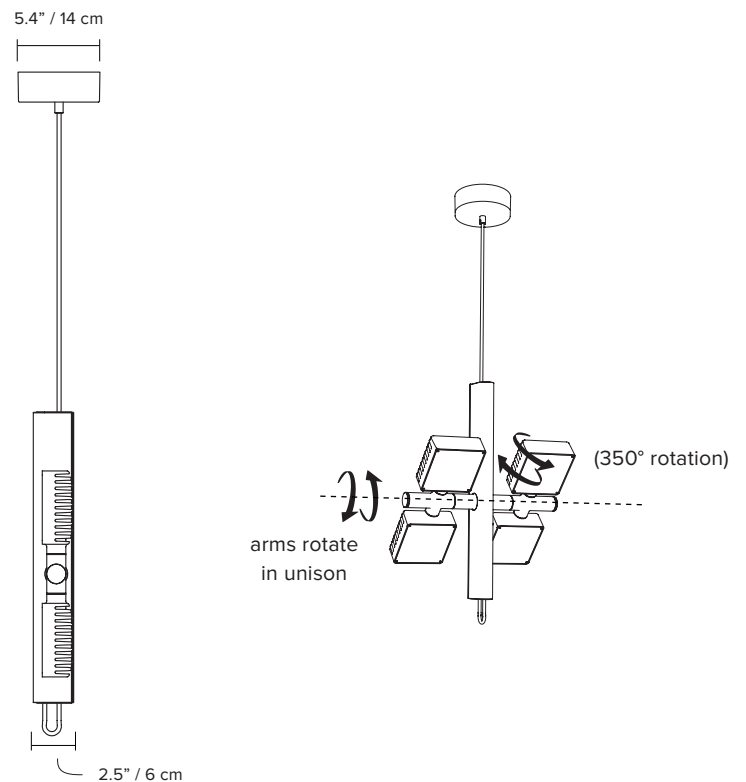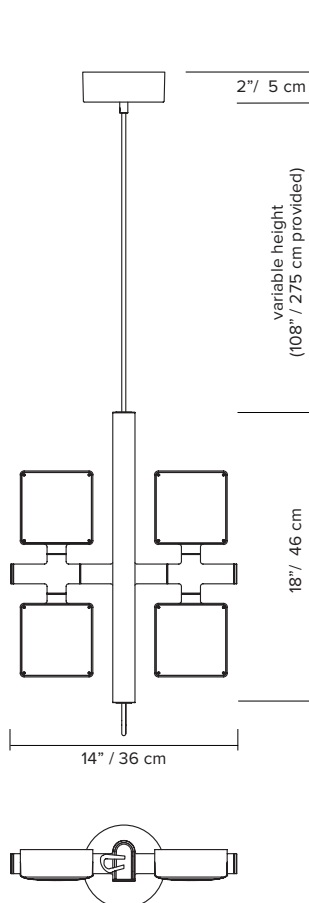


*dimensions are approximate and may vary slightly

ORDER GUIDE: SKU


COLLECTION		MODEL	BODY, CORD AND LOOP		CANOPY	COLOUR TEMPERATURE (CCT)		DIMMING		
DOR	dorval	01	BK	black	BK	black	WL	warm light (2700K)	ZT	0-10V dimming
			WH	white	WH	white	NL	neutral light (3000K)	OT	1-10V dimming
			LB	light blue	LB	light blue	DW	dim to warm (2700K to 2200K)	PH	phase dimming
			AL	aluminium	AL	aluminium	V	variable		
DOR		01	BK		BK		WL		ZT =	DOR01BKBKWLZT
										example

FINISH

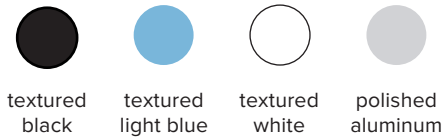

NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- offset available upon request
- not to be suspended by a hook
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on our website for cleaning instructions

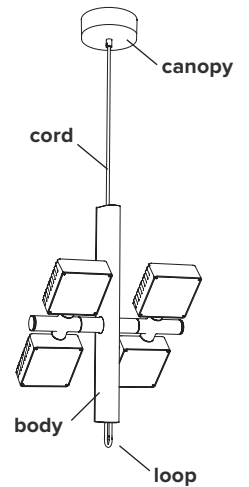

DIMMER SPECIFICATIONS

TESTED DIMMER COMPATIBILITY LIST - 120V*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge**)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Lutron	TGCL-153P	Phase dimming	14%	98%
Leviton	VPE06	Phase dimming	14%	98%
Lutron	DVELV303P	Phase dimming	11%	98%
Lutron	SELV300P	Phase dimming	11%	98%
Lightolier	ZP260QEW	Phase dimming	11%	98%
Lutron	FAELV500	Phase dimming	17%	99%
Lutron	MAELV600	Phase dimming	18%	98%

TESTED DIMMER COMPATIBILITY LIST - 230V*

Compatible with 0-10V, Phase dimming (trailing edge only**)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Clipsal	32E450UDM	Phase dimming	31%	100%
Clipsal	32E450TM	Phase dimming	25%	100%

Some dimmers require a minimum load, check specifications.

*Other dimmers can yield good results and we recommend conducting your own test before final installation

**Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

EU ENERGY LABEL

